

GE
Lighting

LED Lamp Solutions



GE imagination at work

www.gelighting.com

LED's you can trust

More than 15 years of experience in manufacturing and selling high quality LED solutions

Up to 90% energy savings compared to conventional lamps

Up to 50,000 hours of light with our R63 lamps

Reduced maintenance and related costs

Outstanding lumen performance and lumen/watt efficiency.

Low UV and IR (ultraviolet and infrared)



Home



Office



Hospitality



Retail



Omni-directional GLS Lamp

GE's LED retrofit lamps offer a great opportunity to replace incandescent, compact fluorescent or halogen lamps with an LED 2700K Extra Warm White, 270 degree beam angle product for general lighting. GE LEDs are very economical and environmentally friendly: they are mercury free, use far less energy than halogen or incandescent lights, and last longer.

They fit into everyday light fittings and the light comes on the instant you click the switch.

GE's omni-directional lamp enables a 270 degree light distribution unlike traditional LED lamps thus making it an ideal choice for general lighting applications such as table lamps.



- 7.5W & 12W replacements for 40W and 60W
- 270° omni-directional beam
- 2700 Kelvin Colour Temperature
- E27 and B22 cap types



6W Energy Smart™ GU10 Dimmable Lamp

The new generation of dimmable GU10 lamps provide market leading efficiency and lumen performance providing a true replacement for GU10 halogens. The range offers 50W equivalent lamps between 320-360lm, all with a long life of 25,000 hours (L70/B10). The new dimmable GU10 lamps are suitable for both domestic and commercial applications.



- Multiple colour temperatures (3000K)
- Reduces ongoing maintenance costs
- Suitable for track and recessed lighting
- Outstanding performance up to 60lm/W efficiency for 6W lamp



Advanced lighting technologies

7W 12V Energy Smart™ MR16 Dimmable Lamp

The 7W MR16 range has been developed to replace 35W & 50W equivalent MR16 halogen lamps and offers a high level of technical performance in the form of a halogen shaped LED lamp. Simple to change, it offers an outstanding lumen package that ensures a relatively short payback period.



- Multiple colour temperatures (2700-3000K)
- Reduces ongoing maintenance costs
- Suitable for track and recessed lighting
- Outstanding performance up to 56lm/W efficiency for 7W lamp



Decor Candle, Spherical and Globe Lamps

Create a mood and save energy with Decor LED's.

GE's Decor LED range offers decorative looking bulbs that can fit into all existing fixtures with E14, E27 and B22 sockets.

The incandescent-like spherical, candle and globe shapes also come in clear and frosted finishes, offering effective replacement light output and excellent value for money. The range also offers a very broad coverage of market requirements, as well as dimming to add an extra dimension to a superb product range.




- 17,000 hours life
- Lasts up to 17 times longer than similar decorative HAL/INC lamps
- Mercury free
- Up to 250 lumens
- Clear and frosted types
- 2700K
- 100% retrofit




Switching from Watts to Lumens

Traditional light bulbs are being phased out and modern light technologies use different amounts of power to achieve the same amount of light. Instead of referring to watts anymore, we now need to measure and compare light in terms of lumens.

Our LEDs can be used everywhere, from general to mood lighting and spotlighting. To assist in selecting the appropriate LED replacement for your existing Incandescent or Halogen bulb, GE packaging shows relevant product lumens compared to the old wattages.

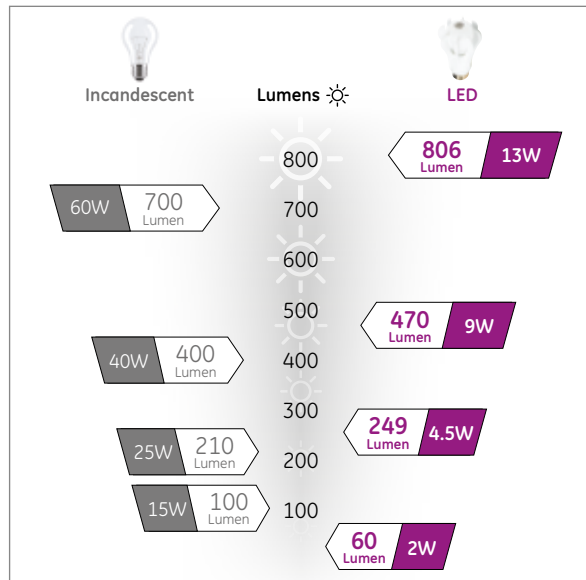

Quick guide to GE Lighting packaging

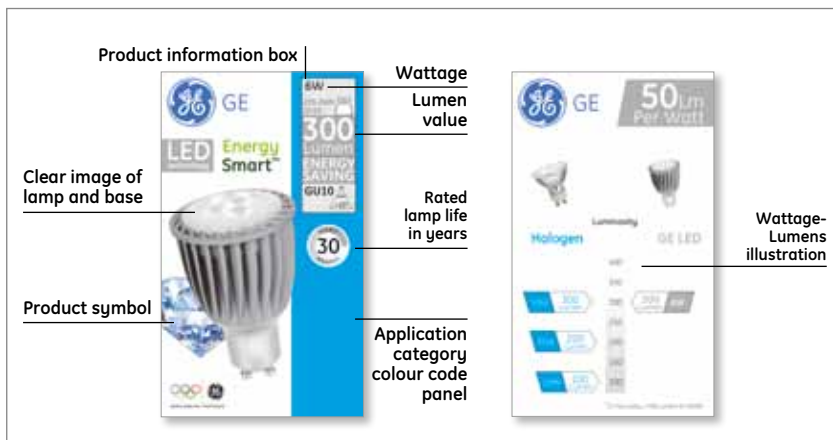

LED Solutions

LED Energy Smart™ Directional



GU10 Dimmable

Cap: GU10
Wattage: 4.5-6.5W
Voltage: 220-240V
Beam Spread: 25-35°
Rated life: 25,000Hrs

Page 10



MR16 Dimmable

Cap: GU5.3
Wattage: 7W
Voltage: 12V
Beam Spread: 15-35°
Rated life: 25,000Hrs

Page 10



MR16

Cap: GU5.3
Wattage: 4-6.5W
Voltage: 12V
Beam Spread: 15-36°
Rated life: 25,000Hrs

Page 11



PAR30 Dimmable

Cap: E27
Wattage: 10W
Voltage: 220-240V
Beam Spread: 20-35°
Rated life: 50,000Hrs

Page 11



R50, R63 Dimmable

Cap: E14, E27
Wattage: 5-7W
Voltage: 220-240V
Beam Spread: 20-35°
Rated life: 25,000-50,000Hrs

Page 11

LED Decor Directional



PAR 16

Cap: E14
Wattage: 1W
Voltage: 220-240V
Rated life: 12,000Hrs

Page 11



GU10

Cap: GU10
Wattage: 1-2W
Voltage: 220-240V
Rated life: 12,000Hrs

Page 11



MR16

Cap: GU5.3
Wattage: 1W
Voltage: 12V
Rated life: 12,000

Page 11



R50

Cap: E14
Wattage: 2W
Voltage: 220-240V
Rated life: 12,000

Page 11

Selector

LED Energy Smart™ GLS, Candle, Spherical



GLS

Cap: E27, B22
Wattage: 5-12W
Voltage: 220-240V
Rated life: 15,000-25,000Hrs

Page 12



Candle Dimmable

Cap: E27, B22, E14
Wattage: 4.5W
Voltage: 220-240V
Rated life: 20,000Hrs

Page 12



Spherical Dimmable

Cap: E27, B22, E14
Wattage: 4.5W
Voltage: 220-240V
Rated life: 20,000Hrs

Page 12

LED Energy Smart™ Globe



Globe Dimmable

Cap: E27, B22
Wattage: 4.5W
Voltage: 220-240V
Rated life: 20,000Hrs

Page 12

LED Decor Candle, Spherical



Candle Dimmable

Cap: E14, B15, B22
Wattage: 4W
Voltage: 230-240V
Rated life: 15,000Hrs

Page 13



Candle

Cap: E14, B15, B22
Wattage: 1.2W
Voltage: 230-240V
Rated life: 15,000Hrs

Page 13



Spherical Dimmable

Cap: E14, E27, B22
Wattage: 4W
Voltage: 230-240V
Rated life: 15,000

Page 13



Spherical

Cap: E14, E27, B22
Wattage: 1.2W
Voltage: 230-240V
Rated life: 15,000

Page 13

Product identification

The following glossary of terms will help you when selecting lamps in this section. Within each product line, lamps are divided into families – within these families, lamps are listed by wattage. The Product Description can be used as a quick reference to each product's attributes. LED lamp and system life is expressed as L70 – the point in time when light output has fallen to 70% of its initial value.

Watts:

Energy Used – Nominal Watts. To estimate energy consumption (kWh), multiply watts x hours of use and divide by 1000

Cap:

The type of cap fitted. See page 148-149 for cap drawings

Volts: Lamp data is based on operation at rated voltage

Product description: The lamp's identification code

Product code:

It is important to use this code when ordering to ensure that you receive the exact product you require

CCT [K]: Colour Temperature – Kelvins
A measure of the visual "warmth" or "coolness" of the light from the lamp. The higher the value the whiter or "cooler" the light appears

Life [L70, h]: LED lamp and system life is expressed as L70 – the point in time when light output has fallen to 70% of its initial value

Length: Lamp length in mm

Additional parameters:

Forward Voltage (Vf) Typical (Vt): Typical voltage drop across the LED when driven at 350mA. Value will vary at different drive currents.

Track Angle: LED Cove is available with 3 mounting options, at 0, 15 and 30 degrees to the horizontal surface.

Wattage [W]

Volts [V]

Cap

Product Description

Product Code

Lumen [lm]

CCT [K]

CRI [Ra]

Life [L70, h]

Diameter [mm]

Length [mm]

Pack Qty

LED Decor Range - Candle

1.2	230-240	E14	LED1.2/B35/830/230-240V/E14/F/HBX1/6	97299	60	3000	80	15,000	39	104	1/6
1.2	230-240	B22	LED1.2/B35/830/230-240V/B22/F/HBX1/6	97300	60	3000	80	15,000	39	102.5	1/6
1.2	230-240	B15	LED1.2/B35/830/230-240V/B15/F/HBX1/6	97301	60	3000	80	15,000	39	102.5	1/6

LED 1.2 / B35 / 8 30 / 230-240V / E14 / F / HBX 1/6

(LED)
Identifies lamp as LED lamp

(1.2)
Identifies Lamp's wattage

(B35)
Identifies the lamp family

(8) Colour rendering
6 - Ra 58 to 67 (Group 2B)
7 - Ra 68 to 77 (Group 2A)
8 - Ra 78 to 87 (Group 1B)
9 - Ra 88 to 97 (Group 1A)

(30) Colour temperature
XX = First 2 digits of temperature in Kelvin - XX00K
Example: 30 is 3000K

(230-240V)
Volts: Lamp data is based on operation at rated voltage

(E14)
Identifies the cap type

(F)
Identifies the finish of the lamp

(HBX)
Identifies product type

(1/6)
Pack quantity: Number of product units packed in a case

Lumens:
Initial Lumens - light output at 100 hours

Diameter:
Bulb diameter in mm

CRI [Ra]:
Colour Rendering Index
An indication of the ability of the lamp to render object colours in a normal, natural way. The higher the number (0-100), the better the colour appearance

Pack quantity:
Number of product units packed in a case

Wattage (W)	Volts (V)	Cap	Product Description	Product Code	Candela (cd)	Lumen (lm)	Beam Angle [°]	CCT (K)	CRI (Ra)	Life (L70, h)	Diameter (mm)	Length (mm)	Pack Qty
4.5	220-240	GU10	LED4.5D/GU10/827/220-240V/FL/BX 1/8	65775	500	170	25	2700	80	25,000	50	58	1/8
4.5	220-240	GU10	LED4.5D/GU10/830/220-240V/FL/BX 1/8	65777	560	180	25	3000	80	25,000	50	58	1/8
4.5	220-240	GU10	LED4.5D/GU10/840/220-240V/FL/BX 1/8	65780	610	200	25	4000	80	25,000	50	58	1/8
4.5	220-240	GU10	LED4.5D/GU10/827/220-240V/WFL/BX 1/8	97248	400	170	35	2700	80	25,000	50	58	1/8
4.5	220-240	GU10	LED4.5D/GU10/830/220-240V/WFL/BX 1/8	97266	450	180	35	3000	80	25,000	50	58	1/8
4.5	220-240	GU10	LED4.5D/GU10/840/220-240V/WFL/BX 1/8	97273	500	200	35	4000	80	25,000	50	58	1/8
5	220-240	GU10	LED5D/GU10/827/220-240V/FL/BX	65249	950	220	25	2700	80	25,000	50.7	56.5	1/8
5	220-240	GU10	LED5D/GU10/827/220-240V/WFL/BX	65250	600	220	35	2700	80	25,000	50.7	56.5	1/8
5	220-240	GU10	LED5D/GU10/830/220-240V/FL/BX	65253	1050	240	25	3000	80	25,000	50.7	56.5	1/8
5	220-240	GU10	LED5D/GU10/830/220-240V/WFL/BX	65254	700	240	35	3000	80	25,000	50.7	56.5	1/8
5	220-240	GU10	LED5D/GU10/840/220-240V/FL/BX	65799	1200	270	25	4000	80	25,000	50	58	1/8
5	220-240	GU10	LED5D/GU10/840/220-240V/WFL/BX	65801	750	270	35	4000	80	25,000	50	58	1/8
6	220-240	GU10	LED6D/GU10/827/220-240V/FL BX 1/8	98170	1250	320	25	2700	80	25,000	50.2	57	1/10
6	220-240	GU10	LED6D/GU10/827/220-240V/WFL BX 1/8	98172	700	320	35	2700	80	25,000	50.2	57	1/10
6	220-240	GU10	LED6D/GU10/830/220-240V/FL BX 1/8	98173	1280	340	25	3000	80	25,000	50.2	57	1/10
6	220-240	GU10	LED6D/GU10/830/220-240V/WFL BX 1/8	98174	720	340	35	3000	80	25,000	50.2	57	1/10
6	220-240	GU10	LED6D/GU10/840/220-240V/FL BX 1/8	98175	1400	360	25	4000	80	25,000	50.2	57	1/10
6	220-240	GU10	LED6D/GU10/840/220-240V/WFL BX 1/8	98176	780	360	35	4000	80	25,000	50.2	57	1/10
6.5	220-240	GU10	LED6.5D/GU10/827/220-240V/FL/BX	65252	1600	400	25	2700	80	25,000	50.7	77.6	1/8
6.5	220-240	GU10	LED6.5D/GU10/827/220-240V/WFL/BX	65255	750	380	35	2700	80	25,000	50.7	77.6	1/8
6.5	220-240	GU10	LED6.5D/GU10/830/220-240V/FL/BX	65256	1600	400	25	3000	80	25,000	50.7	77.6	1/8
6.5	220-240	GU10	LED6.5D/GU10/830/220-240V/WFL/BX	65257	750	380	35	3000	80	25,000	50.7	77.6	1/8
6.5	220-240	GU10	LED6.5D/GU10/840/220-240V/FL/BX	65258	1800	450	25	4000	80	25,000	50.7	77.6	1/8
6.5	220-240	GU10	LED6.5D/GU10/840/220-240V/WFL/BX	65259	850	430	35	4000	80	25,000	50.7	77.6	1/8



Wattage (W)	Volts (V)	Cap	Product Description	Product Code	Candela (cd)	Lumen (lm)	Beam Angle [°]	CCT (K)	CRI (Ra)	Life (L70, h)	Diameter (mm)	Length (mm)	Pack Qty
7	12	GU5.3	LED7DMR16/827/15	65808	3500	370	15	2700	80	25,000	50	50	1/8
7	12	GU5.3	LED7DMR16/827/25	65809	1800	370	25	2700	80	25,000	50	50	1/8
7	12	GU5.3	LED7DMR16/827/35	65810	1000	370	35	2700	80	25,000	50	50	1/8
7	12	GU5.3	LED7DMR16/830/25	65805	1900	390	25	3000	80	25,000	50	50	1/8
7	12	GU5.3	LED7DMR16/830/15	65806	3700	390	15	3000	80	25,000	50	50	1/8
7	12	GU5.3	LED7DMR16/830/35	65807	1100	390	35	3000	80	25,000	50	50	1/8
7	12	GU5.3	LED7DMR16/840/15	65811	4000	430	15	4000	80	25,000	50	50	1/8
7	12	GU5.3	LED7DMR16/840/25	65812	2100	430	25	4000	80	25,000	50	50	1/8
7	12	GU5.3	LED7DMR16/840/35	65813	1200	430	35	4000	80	25,000	50	50	1/8
7X	12	GU5.3	LED7XDMR16827/25	65816	2400	440	25	2700	80	25,000	50	48.7	1/8
7X	12	GU5.3	LED7XDMR16827/35	65817	1400	440	35	2700	80	25,000	50	48.7	1/8
7X	12	GU5.3	LED7XDMR16830/25	65814	2500	460	25	3000	80	25,000	50	48.7	1/8
7X	12	GU5.3	LED7XDMR16830/35	65815	1500	460	35	3000	80	25,000	50	48.7	1/8
7X	12	GU5.3	LED7XDMR16840/25	65818	2700	510	25	4000	80	25,000	50	48.7	1/8
7X	12	GU5.3	LED7XDMR16840/35	65819	1600	510	35	4000	80	25,000	50	48.7	1/8



LED Solutions



Wattage (W)	Volts (V)	Cap	Product Description	Product Code	Candela (cd)	Lumen (lm)	Beam Angle (°)	CCT (K)	CRI (Ra)	Life (L70, h)	Diameter (mm)	Length (mm)	Pack Qty
LED Energy Smart™ Range - MR16													
4	12	GU5.3	LED 4/MR16/827/12V/GU5.3/FL	63633	960	240	25	2700	80	25,000	50.7	46	1/8
4	12	GU5.3	LED 4/MR16/827/12V/GU5.3/SP	63634	2500	210	15	2700	80	25,000	50.7	46	1/8
4	12	GU5.3	LED 4/MR16/827/12V/GU5.3/WFL	63635	580	240	36	2700	80	25,000	50.7	46	1/8
4	12	GU5.3	LED 4/MR16/830/12V/GU5.3/SP	63636	2500	210	15	3000	80	25,000	50.7	46	1/8
4	12	GU5.3	LED 4/MR16/830/12V/GU5.3/FL	63637	960	240	25	3000	80	25,000	50.7	46	1/8
4	12	GU5.3	LED 4/MR16/830/12V/GU5.3/WFL	63638	580	240	36	3000	80	25,000	50.7	46	1/8
6.5	12	GU5.3	LED 6.5/MR16/830/12V/GU5.3/FL BX 1/8	98188	1600	320	24	3000	80	25,000	50	46	1/8



Wattage (W)	Volts (V)	Cap	Product Description	Product Code	Candela (cd)	Lumen (lm)	Beam Angle (°)	CCT (K)	CRI (Ra)	Life (L70, h)	Diameter (mm)	Length (mm)	Pack Qty
LED Energy Smart™ Range - PAR30 dimmable													
10	220-240	E27	LED10DP30S/827/20/E27	79409	3450	450	20	2700	80	50,000	97	99	1/6
10	220-240	E27	LED10DP30S/827/35/E27	79410	1100	450	35	2700	80	50,000	97	99	1/6
10	220-240	E27	LED10DP30S/830/20/E27	79411	3720	500	20	3000	80	50,000	97	99	1/6
10	220-240	E27	LED10DP30S/830/35/E27	79412	1130	500	35	3000	80	50,000	97	99	1/6



Wattage (W)	Volts (V)	Cap	Product Description	Product Code	Candela (cd)	Lumen (lm)	Beam Angle (°)	CCT (K)	CRI (Ra)	Life (L70, h)	Diameter (mm)	Length (mm)	Pack Qty
LED Energy Smart™ Range - R50, R63 dimmable													
5	220-240	E14	LED5D/R50/827/220-240V/WFL HBX 1/8	97283	500	220	35	2700	80	25,000	50.2	82.9	1/8
7	220-240	E27	LED7DR63S/827/20/E27	62578	1900	300	20	2700	80	50,000	65	105	1/8
7	220-240	E27	LED7DR63S/827/35/E27	62582	830	300	35	2700	80	50,000	65	105	1/8
7	220-240	E27	LED7DR63S/830/20/E27	79407	2000	330	20	3000	80	50,000	65	105	1/8
7	220-240	E27	LED7DR63S/830/35/E27	79408	850	330	35	3000	80	50,000	65	105	1/8



Wattage (W)	Volts (V)	Cap	Product Description	Product Code	Candela (cd)	Lumen (lm)	Beam Angle (°)	CCT (K)	CRI (Ra)	Life (L70, h)	Diameter (mm)	Length (mm)	Pack Qty
LED Decor Range - GU10													
1	220-240	GU10	OT LED GU10 1W 220-240V WHITE GE BX1/10	96736	80	28	20	5500	70	12,000	50.7	57	1/10
2	230-240	GU10	LED 2/GU10/630/230-240V/SP HBX	63982	500	110	15	3000	60	12,000	50.7	59	1/8



Wattage (W)	Volts (V)	Cap	Product Description	Product Code	Candela (cd)	Lumen (lm)	Beam Angle (°)	CCT (K)	CRI (Ra)	Life (L70, h)	Diameter (mm)	Length (mm)	Pack Qty
LED Decor Range - MR16													
1	12	GU5.3	OT LED MR16 GU5.3 1W 12V WHITE GE BX1/10	96739	80	28	20	5000	70	12,000	50.7	50.5	1/10

Wattage (W)	Volts (V)	Cap	Product Description	Product Code	Candela (cd)	Lumen (lm)	Beam Angle (°)	CCT (K)	CRI (Ra)	Life (L70, h)	Diameter (mm)	Length (mm)	Pack Qty
LED Decor Range - PAR16													
1	220-240	E14	OT LED PAR16 E14 1W 220-240V WHITE GE BX	96740	80	28	20	5000	70	12,000	57.2	76	1/10



Wattage (W)	Volts (V)	Cap	Product Description	Product Code	Candela (cd)	Lumen (lm)	Beam Angle (°)	CCT (K)	CRI (Ra)	Life (L70, h)	Diameter (mm)	Length (mm)	Pack Qty
LED Decor Range - R50													
2	230-240	E14	LED 2/R50/630/230-240V/SP/E14 HBX	97179	500	110	15	3000	60	12,000	50.7	76	1/8

Wattage (W)	Volts (V)	Cap	Product Description	Product Code	Lumen (lm)	CCT (K)	CRI (Ra)	Life (L70, h)	Diameter (mm)	Length (mm)	Pack Qty
5	220-240	E27	LED5/GLS/827/220-240/E27/HBX	65737	185	2700	80	25,000	63.5	110	1/8
5	220-240	E27	LED5/GLS/830/220-240/E27/HBX	79428	200	3000	80	25,000	63.5	110	1/6
5	220-240	B22	LED5/GLS/827/220-240/B22/HBX	65742	185	2700	80	25,000	63.5	108.5	1/8
5	220-240	B22	LED5/GLS/830/220-240/B22/HBX	79432	200	3000	80	25,000	63.5	108.5	1/6
9	220-240	E27	LED9/GLS/827/220-240/E27/HBX	65739	405	2700	80	25,000	63.5	110	1/8
9	220-240	E27	LED9/GLS/830/220-240/E27/HBX	79426	430	3000	80	25,000	63.5	110	1/6
9	220-240	B22	LED9/GLS/827/220-240/B22/HBX	65736	405	2700	80	25,000	63.5	110	1/8
9	220-240	B22	LED9/GLS/830/220-240/B22/HBX	79430	430	3000	80	25,000	63.5	110	1/6
8	230-240	E27	LED8D/A60/827/230-240V/E27/F/HBX1/6	97311	470	2700	80	15,000	61	115	1/6
8	230-240	B22	LED8D/A60/827/230-240V/B22/F/HBX1/6	97312	470	2700	80	15,000	61	115	1/6
9	220-240	E27	LED9/GLS/OMNI/830/220-240V/E27 HBX	63640	470	3000	80	25,000	69	116	1/6
9	220-240	B22	LED9/GLS/OMNI/830/220-240V/B22 HBX	63639	470	3000	80	25,000	69	116	1/6
7.5	220-240	E27	LED7.5/GLS/OMNI/827/220-240V/E27 HBX	97992	470	2700	80	15,000	62	110	1/8
7.5	220-240	B22	LED7.5/GLS/OMNI/827/220-240V/B22 HBX	97993	470	2700	80	15,000	62	110	1/8
12	220-240	E27	LED12/GLS/OMNI/827/220-240V/E27 HBX	97994	810	2700	80	15,000	62	110	1/8
12	220-240	B22	LED12/GLS/OMNI/827/220-240V/B22 HBX	97995	810	2700	80	15,000	62	110	1/8



Wattage (W)	Volts (V)	Cap	Product Description	Product Code	Lumen (lm)	CCT (K)	CRI (Ra)	Life (L70, h)	Diameter (mm)	Length (mm)	Pack Qty
4.5	220-240	E27	LED4.5D/B35/827/E27/220-240V/FR	98204	250	2700	80	20,000	36	98.5	1/10
4.5	220-240	E27	LED4.5D/B35/827/E27/220-240V/CL	98205	250	2700	80	20,000	36	98.5	1/10
4.5	220-240	E14	LED4.5D/B35/827/E14/220-240V/FR	98207	250	2700	80	20,000	36	104	1/10
4.5	220-240	E14	LED4.5D/B35/827/E14/220-240V/CL	98208	250	2700	80	20,000	36	104	1/10
4.5	220-240	B22	LED4.5D/B35/827/B22/220-240V/FR	98213	250	2700	80	20,000	36	97	1/10
4.5	220-240	B22	LED4.5D/B35/827/B22/220-240V/CL	98215	250	2700	80	20,000	36	97	1/10
4.5	220-240	E14	LED4.5D/B35BT/827/E14/220-240V/FR	98217	250	2700	80	20,000	36	123.5	1/6



Wattage (W)	Volts (V)	Cap	Product Description	Product Code	Lumen (lm)	CCT (K)	CRI (Ra)	Life (L70, h)	Diameter (mm)	Length (mm)	Pack Qty
4.5	220-240	E27	LED4.5D/P45/827/E27/220-240V/FR	98221	250	2700	80	20,000	46	74	1/6
4.5	220-240	E14	LED4.5D/P45/827/E14/220-240V/FR	98222	250	2700	80	20,000	46	80	1/6
4.5	220-240	B22	LED4.5D/P45/827/B22/220-240V/FR	98224	250	2700	80	20,000	46	72.5	1/6



Wattage (W)	Volts (V)	Cap	Product Description	Product Code	Lumen (lm)	CCT (K)	CRI (Ra)	Life (L70, h)	Diameter (mm)	Length (mm)	Pack Qty
4.5	220-240	E27	LED4.5D/G80/827/E27/220-240V/FR	98225	250	2700	80	20,000	46	112.5	1/6
4.5	220-240	B22	LED4.5D/G80/827/B22/220-240V/FR	98226	250	2700	80	20,000	81	111	1/6



LED Solutions

Wattage (W)	Volts (V)	Cap	Product Description	Product Code	Lumen (lm)	CCT (K)	CRI (Ra)	Life (L70, h)	Diameter (mm)	Length (mm)	Pack Qty
-------------	-----------	-----	---------------------	--------------	------------	---------	----------	---------------	---------------	-------------	----------

LED Decor Range - Candle dimmable



4	230-240	E14	LED4D/B35/827/230-240V/E14/F/HBX1/6	97305	220	2700	80	15000	39	104	1/6
4	230-240	B22	LED4D/B35/827/230-240V/B22/F/HBX1/6	97306	220	2700	80	15000	39	102.5	1/6
4	230-240	B15	LED4D/B35/827/230-240V/B15/F/HBX1/6	97307	220	2700	80	15000	39	102.5	1/6

LED Decor Range - Candle



1.2	230-240	E14	LED1.2/B35/830/230-240V/E14/F/HBX1/6	97299	60	3000	80	15000	39	104	1/6
1.2	230-240	B22	LED1.2/B35/830/230-240V/B22/F/HBX1/6	97300	60	3000	80	15000	39	102.5	1/6
1.2	230-240	B15	LED1.2/B35/830/230-240V/B15/F/HBX1/6	97301	60	3000	80	15000	39	102.5	1/6

LED Decor Range - Spherical dimmable



4	230-240	E14	LED4D/P45/827/230-240V/E14/F/HBX1/6	97308	220	2700	80	15000	46	80	1/6
4	230-240	B22	LED4D/P45/827/230-240V/B22/F/HBX1/6	97309	220	2700	80	15000	46	72.5	1/6
4	230-240	E27	LED4D/P45/827/230-240V/E27/F/HBX1/6	97310	220	2700	80	15000	46	74	1/6

LED Decor Range - Spherical



1.2	230-240	E14	LED1.2/P45/830/230-240V/E14/F/HBX1/6	97302	60	3000	80	15000	46	80	1/6
1.2	230-240	E27	LED1.2/P45/830/230-240V/E27/F/HBX1/6	97303	60	3000	80	15000	46	74	1/6
1.2	230-240	B22	LED1.2/P45/830/230-240V/B22/F/HBX1/6	97304	60	3000	80	15000	46	72.5	1/6



www.gelighting.com



and General Electric are both registered trademarks of the General Electric Company

GE Lighting is constantly developing and improving its products. For this reason, all product descriptions in this brochure are intended as a general guide, and we may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this publication present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, GE Lighting cannot accept any liability arising from the reliance on such data to the extent permitted by law.